

Hex Head Cap Screws

SAE Grade 5 J429 Magnaguard Black Coating




Coarse Thread. Medium carbon steel, quenched and tempered in accordance with SAE J429 material requirements and ANSI/ASME B18.2.1 dimensional tolerances. Compatible with UNC grade 5 hex nuts, all metal lock nuts or nylon insert locknuts. USS or SAE mild steel or hardened flat washers as well as helical spring lock washers may also be used with these cap screws for a complete assembly.

1/4 - 20

Length	Part Number	Lbs. Per 100 Pcs.	Package Quantity
3/4"	1001034	1.44	100

Hex Head Cap Screws

SAE Grade 5 J429 Copper Plated (.0005 to .0008 thick)

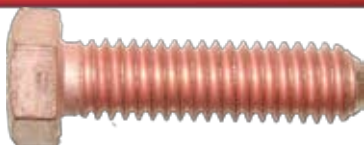

Coarse Thread. Copper plated to .0004 - .0008 thickness. Medium carbon steel, quenched and tempered in accordance with SAE J429 material requirements and ANSI/ASME B18.2.1 dimensional tolerances. Compatible with UNC grade 5 hex nuts, all metal lock nuts or nylon insert locknuts. USS or SAE mild steel or hardened flat washers as well as helical spring lock washers may also be used with these cap screws for a complete assembly.

3/8 - 16

Length	Part Number	Lbs. Per 100 Pcs.	Package Quantity
1 1/4"	1006074	4.86	50

Need
 Grade 8?
 See
 Page
 18.

Hex Head Cap Screws

SAE Grade 2 J429 Zinc Clear



Coarse Thread. Low carbon steel in accordance with SAE J429 material requirements and ANSI/ASME B18.2.1 dimensional tolerances. Compatible with UNC and UNF grade 2 or 5 hex nuts, all metal lock nuts or nylon insert lock nuts. USS or SAE mild steel or hardened flat washers as well as helical spring lock washers may also be used with these cap screws for a complete assembly. Cap screws are zinc clear finish.

1/2 - 13

Length	Part Number	Lbs. Per 100 Pcs.	Package Quantity
3 1/2"	2008186	22.63	10

3/4 - 10

Length	Part Number	Lbs. Per 100 Pcs.	Package Quantity
4"	2008187	60.00	5

Reference numbers and part weights are provided as a reference only.
 Actual part weight may vary from weights shown.